


## Vario compact Laser marking machine

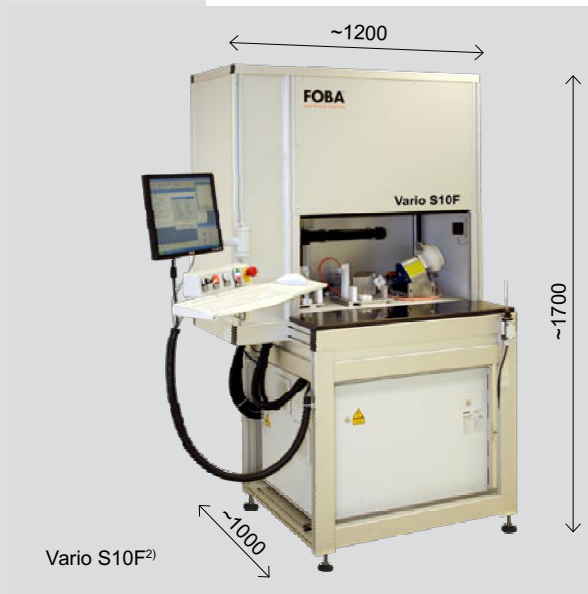

### Working area

with fixed worktable

Vario S pneumatic lifting door  
d=600 mm

with rotating table

Vario R pneumatic lifting door  
Vario RD turning bulkhead wall

Special types

### Basic module

Laser system	DP10F, DP20F
Laser properties	see data sheet basic system
Machine body	Aluminium profiles
Components	Z-axis (with step motor) for height adjustment 1 axis step motor control Operating and display units

### Control

PC	CompactPCI-PC
Operating system	MS Windows XP
Laser control	FOBAGRAF with import functions of plt/ dwg/ dxf/ ai/ jpg/ tif/ pcx/ bmp ...
Interfaces	serial, digital I/O, Ethernet, USB
Machine control	

### Options

Pointer	Adjustment aid
Scan head	
Changeable lens	100 mm/ 163 mm/ 254 mm/ 420 mm
Rotating table	d=680 mm
Suction filter	

### Installation

The way the unit is set up depends on the design of the working area and the integrated laser system.

Electrical	1/N/PE, AC 230 V, ± 10%, 50/60 Hz
Power consumption	0.7 - 1.5 kVA <sup>1)</sup>
Cooling	Air
Temperature	15 - 40 °C
Humidity	90 % (up to max. 20 °C) 30 % (up to max. 40 °C) non-condensing
Weight	250 - 300 kg <sup>1)</sup>
Degree of protection	Machine IP54 Monitor, keyboard and mouse IP 20
Safety	Laser class 1

<sup>1)</sup> depends on the design of the working area

<sup>2)</sup> Figure with options

# FOBA®

Laser Marking + Engraving

A Gerber Technology Company

FOBA  
Technology + Services GmbH  
Altenaer Straße 170  
D-58513 Lüdenscheid  
Germany

Tel. +49 (0) 2351 996-0  
Fax +49 (0) 2351 996-210  
sales@foba.de

www.foba.de  
www.gerbertechnology.com

# SIGNEA SYSTEME

+27 11 965 0823  
signea@mweb.co.za  
www.signea.co.za

